



-
-
-
-
-
-

-
-
-
-
-

Storage Temperature Range	T	C	-40	+85
Relative Humidity	RH	%	5	85
Power Supply Voltage	Vcc	V	-0.5	+3.6
Operating Case Temperature Range	Tc	C	-5	75
Receiver Data Rate Threshold Power Level	P _{dag}	dB	+5.5	

Operating Case Temperature Range	Tc	C	0	70
Power Supply Voltage	Vcc	V	3.2	3.3
Data Rate	Gb/		103.125	112

I	High V I age	1.2VIH	V	0.84	1.5
I	L V I age	1.2VIL	V	-0.3	0.36
I	Leakage C e	1.2IIN	A	-100	+100
O	High V I age				

OMA f Each Lane
L A e dB

13	GLB_ALARM	Global Alarm	I	3.3V LVCMOS	Ok	Alarm	
18	MDIO	Management Data IO Bi-Directional Data					

	Delay Time					OR f A cia ed MDIO ala & a egi e .Plea e ee MDIO d c e f f he de ail
	Ma age e I e face Cl ck Pe i d	_ d	25 0			MDC i 4MH a e
	i MDIO _ e H MDIO _h ld	_ e _h ld	10 10			

O i alTa i e a dRecei e M i Cl ckCha ac e i ic						
I eda ce	Id	Mi80	T100	Ma120	U iΩ	N e
F e e c					MH	1/8 fNe k la e a e
O Diffe e ial V l age	V _{DIFF}	400		1200	V	Peak Peak Diffe e ial
Cl ck D C cle		40		60	%	

CFP Regi e All ca i			
S a i g			
Add e	E di g	Acce	All ca ed
i He	Add e	T e	
	i He		

CFP NVR1

He Add	Si e	Acce T e	Bi	Regi e Na e	C e (HEX)	LSB U i
Ba e ID I f a i						
8000	1	RO	7 0	M d le Ide ifie	12	N/A
8001	1	RO	7 0	E e ded Ide ifie	E4	N/A
8002	1	RO	7 0	C ec T e C de	07	N/A
8003	1	RO	7 0	E he e A lica i C de	01	N/A
8004	1	RO	7 0	Fibe Cha el A lica i C de	00	N/A
8005	1	RO	7 0	C e Li k A lica i C de	00	N/A
8006	1	RO	7 0	SONET/SDH A lica i C de	00	N/A
8007	1	RO	7 0	OTN A lica i C de	08	N/A
8008	1	RO	7 0	Addi i al Ca able Ra e S ed	18	N/A
8009	1	RO	7 0	N be f La e S ed	44	N/A
800A	1	RO	7 0	Media P e ie	11	N/A
800B	1	RO	7 0			

				N be		
8069	1	RO	7 0	CFP MSA Ma age e I e face S ecifica i Re i i N be		
806A	2	RO	7 0	M d le Ha d a e Ve i N be		
806C	2	RO	7 0	M d le Fi a e Ve i N be		
806E	1					


809A	2	RO	7 0	A ilia 1 M i High Wa i g Th e h ld		
809C	2	RO	7 0	A ilia 1 M i L Wa i g Th e h ld		
809E	2	RO	7 0	A ilia 1 M i L Ala Th e h ld		
80A0	2	RO	7 0	A ilia 2 M i High Ala Th e h ld		
80A2	2	RO	7 0	A ilia 2 M i High Wa i g Th e h ld		
80A4	2	RO	7 0	A ilia 2 M i L Wa i g Th e h ld		
80A6	2	RO	7 0	A ilia 2 M i L Ala Th e h ld		
80A8	2	RO	7 0	La e Bia C e High Ala Th e h ld		
80AA						

				0 15		
--	--	--	--	------	--	--

He Add	Si e	Acce T e	Bi	Regi e Na e	C e (HEX)	LSB U i
Ba e ID I f a i						
8180	1	RO	7 0	CFP NVR3 Check		
8181	127	RO	7 1	Re e ed		

He Add	Si e	Acce T e	Bi	Regi e Na e	C e (HEX)	LSB U i
M d le C a d/Se Regi e						
A000	2	RO	15 0	Re e ed		
A002	2	RO	15 0	Re e ed		
A004	1	RO				
			8 6	Re e ed		
			4	Re e ed		
			3 2	C a d Sa		
		RW	15 9	Re e ed		
			5	U e Re e a d Sa e C a d		
			1 0	E e ded C a d		
A005	1	RO				
			15 8	Re e ed		
		RW	7 0	F c i Selec C de		
A006	1	RO				
			15 8	Re e ed		
		RW	7 0	F c i Selec C de		

		RW	11	S f PRG_CNTL2 C I		
		RW	10	S f PRG_CNTL1 C I		
		RW	9	S f GLB_ALRM Te		
		RO	8 6	Re e ed		
		RO	5	TX_DIS Pi S a e		
		RO	4	MOD_LOPWR Pi S a e		
		RO	3	PRG_CNTL3 Pi S a e		
		RO	2	PRG_CNTL2 Pi S a e		
		RO	1	PRG_CNTL1 Pi S a e		
		RO	0	Re e ed		
A011	1					
		RO	15	Re e ed		
		RW	14	TX PRBS Ge e a E able		
		RW	13	TX PRBS Pa e 1		
		RW	12	TX PRBS Pa e 0		
		RW	11	TX De- ke E able		
		RW	10	TX FIFO Re e		
		RW	9	TX FIFO A Re e		
		RW	8	TX Re e		
		RW	7 5	TX MCLK C I		
		RO	4	Re e ed		
		RW	3 1	TX Ra e Selec (10G la e a e)		




RW

				S a		
			6	La e 6 Ala a d Wa i g S a		
			5	La e 5 Ala a d Wa i g S a		
			4	La e 4 Ala a d Wa i g S a		
			3	La e 3 Ala a d Wa i g S a		
			2	La e 2 Ala a d Wa i g S a		
			1	La e 1 Ala a d Wa i g S a		
			0	La e 0 Ala a d Wa i g S a		
A01A	1	RO				
			15	La e 15 Fa l a d S a S a		
			14	La e 14 Fa l a d S a S a		
			13	La e 13 Fa l a d S a S a		
			12	La e 12 Fa l a d S a S a		
			11	La e 11 Fa l a d S a S a		
			10	La e 10 Fa l a d S a S a		
			9	La e 9 Fa l a d S a S a		
			8	La e 8 Fa l a d S a S a		
			7	La e 7 Fa l a d S a S a		
			6	La e 6 Fa l a d S a		

				9	S	a			
					La	e	9	Fa	I
					S	a		a	d
								S	a

A020	1	RO	1	M d SOA Bia L Wa i g		
			0	M d SOA Bia L Ala		
			15 8	Re e ed		
			7	M d A 1 High Ala		
			6	M d A 1 High Wa i g		



		RO	0	Re e ed		
A02B	1	RO		M d le Ala a d Wa i g 1 E able		
			15 12	Re e ed		
			11	M d Te Hi Ala E able		
			10	M d Te Hi Wa E able		
			9	M d Te L Wa i g E able		
			8	M d Te L Ala E able		
			7	M d Vcc High Ala E able		
			6	M d Vcc High Wa i g E able		
			5	M d Vcc L Wa i g E able		
			4	M d Vcc L Ala E able		
			3	M d SOA Bia High Ala E able		
			2	M d SOA Bia High Wa i g E able		
			1	M d SOA Bia L Wa i g E able		
			0	M d SOA Bia L Ala E able		
A02C	1					
		RO	15 8			

Ne k La e VR1		
He Add	Si e	

		RW	14	La e Wa ele g h U l cked Fa l E able		
		RW	13	La e APD P e S l Fa l E able		
		RO	12 8	Re e ed		
		RW	7	La e TX_LOSF E able		
		RW	6	La e TX_LOL E able		
		RO	5	Re e ed		
		RW	4	La e RX_LOS E able		
		RW	3	La e RX_LOL E able		
		RW	2	La e RX FIFO S a E able		
		RO	1 0	Re e ed		
A260	32	RO		Re e ed		

LIGHTING YOUR DREAMS



2013-2014


--	--	--

52	TX2	5	3.3V	52	TX1
51	TX2	6	3.3V	51	TX1
50	GND	7	3.3V_GND	50	GND
49	TX1	8	3.3V_GND	49	TX2
48	TX1	9	VND_IO_A	48	TX2
47	GND	10	VND_IO_B	47	GND
46	TX0	11	TX_DIS(PRG_CNTL1)	46	TX3
45	TX0	12	RX_LOS(PRG_ALRM1)	45	TX3
44	GND	13	GLB_ALRM	44	GND
43	REFCLK	14	MOD_LOPWR	43	REFCLK
42	REFCLK	15	MOD_ABS	42	REFCLK
41	GND	16	MOD_RST	41	GND
40	RX3	17	MDC	40	RX3
39	RX3	18	MDIO	39	RX3
38	GND	19	PRTADR0	38	GND
37	RX2	20	PRTADR1	37	RX2
36	RX2	21	PRTADR2	36	RX2

8	3.3V_GND			3.3V M d le S I V l age Re G d,ca be e a a e ied ge he i h Sig al
9	VND_IO_A	I/O		M d le Ve d I/O. D N C ec
10	VND_IO_B	I/O		M d le Ve d I/O. D N C ec
11	TX_DIS(PRG_CNTL1)	I	LVC MOS /PUR	T a i e Di able f all la e , 1 NC= a i e di abled, 0 = a i e e abled (O i all c fig able a P g a able C l l af e Re e)
12	RX_LOS(PRG_ALRM1)	O	LVC MOS	Recei e L f O ical Sig al, "1": l ical ig al, "0": al c di i (O i all c fig able a P g a able Ala l af e Re e)
13	GLB_ALRM	O	LVC MOS	Gl bal Ala . 0": ala c di i i a MDIO Ala egi e, "1": ala c di i , O e D ai , P ll U Re i H
14	MOD_LOPWR	I	LVC MOS /PUR	M d le L P e M de. "1" NC: d le i l e (afe) de, "0": e - e abled

30	RX0	O	CML	O Da a
31	RX0	O	CML	I e ed O Da a
32	GND			
33	RX1	O	CML	O Da a
34	RX1	O	CML	I e ed O Da a
35	GND			
36	RX2	O	CML	O Da a
37	RX2	O	CML	I e ed O Da a
38	GND			
39	RX3	O	CML	O Da a
40	RX3	O	CML	I e ed O Da a
41	GND			
42	REFCLK	I	CML	Refe e ce I Cl ck
43	REFCLK	I	CML	Refe e ce I e ed I Cl ck
44	GND			
45	TX0	I	CML	I Da a
46	TX0	I	CML	I e ed I Da a
47	GND			
48	TX1	I	CML	I Da a
49	TX1	I	CML	I e ed I Da a
50	GND			
51	TX2	I	CML	I Da a
52	TX2	I	CML	I e ed I Da a
53	GND			
54	TX3	I	CML	

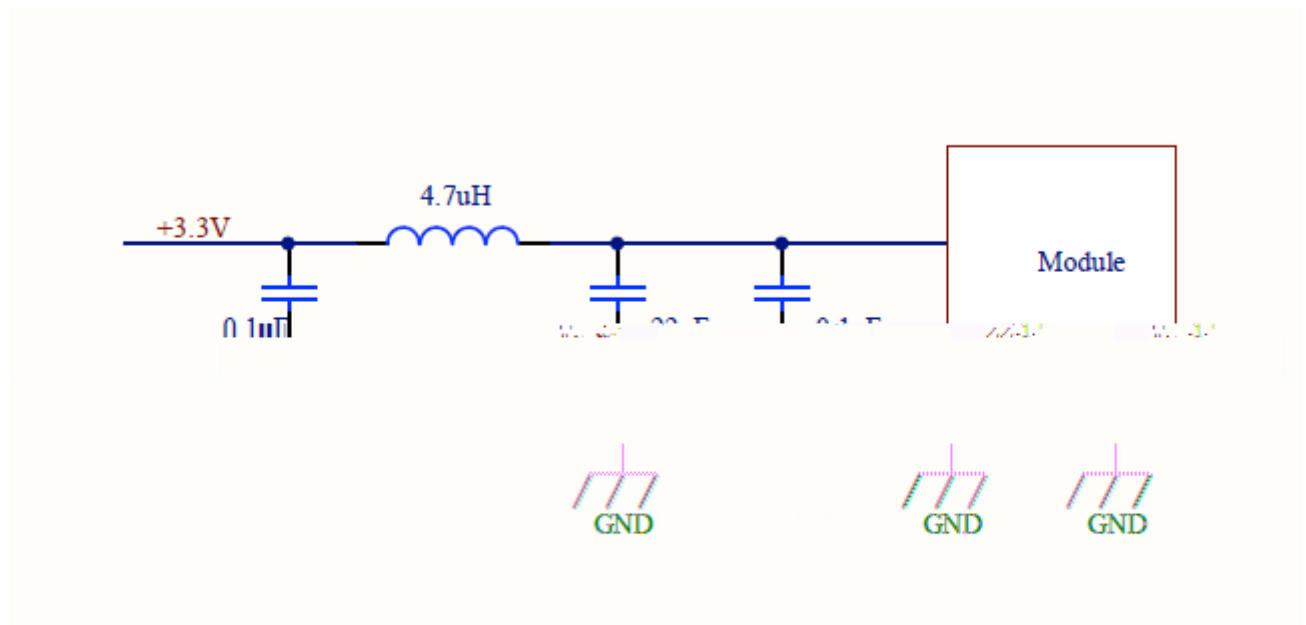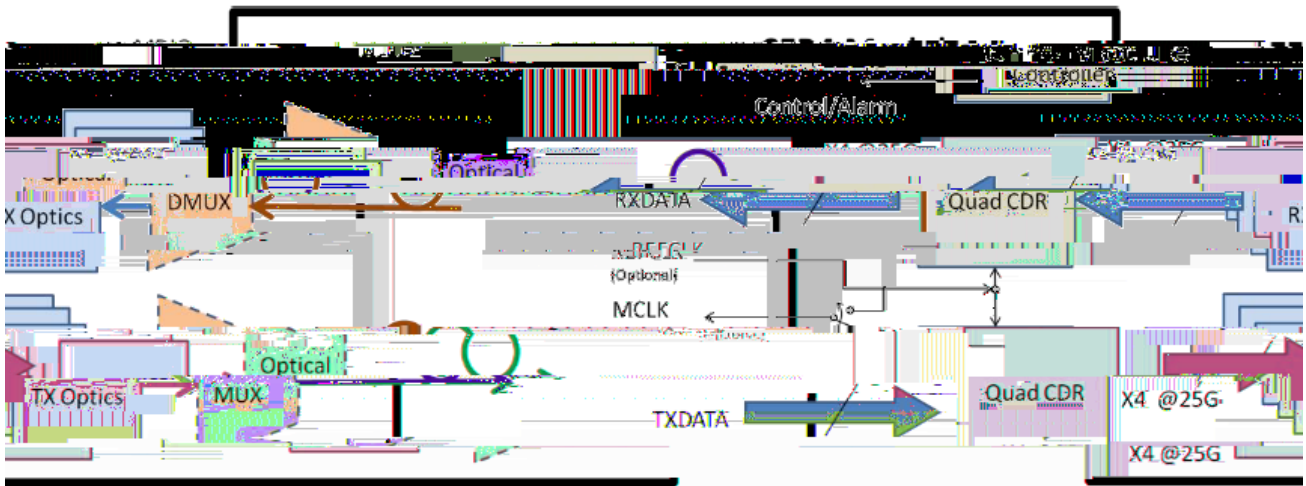

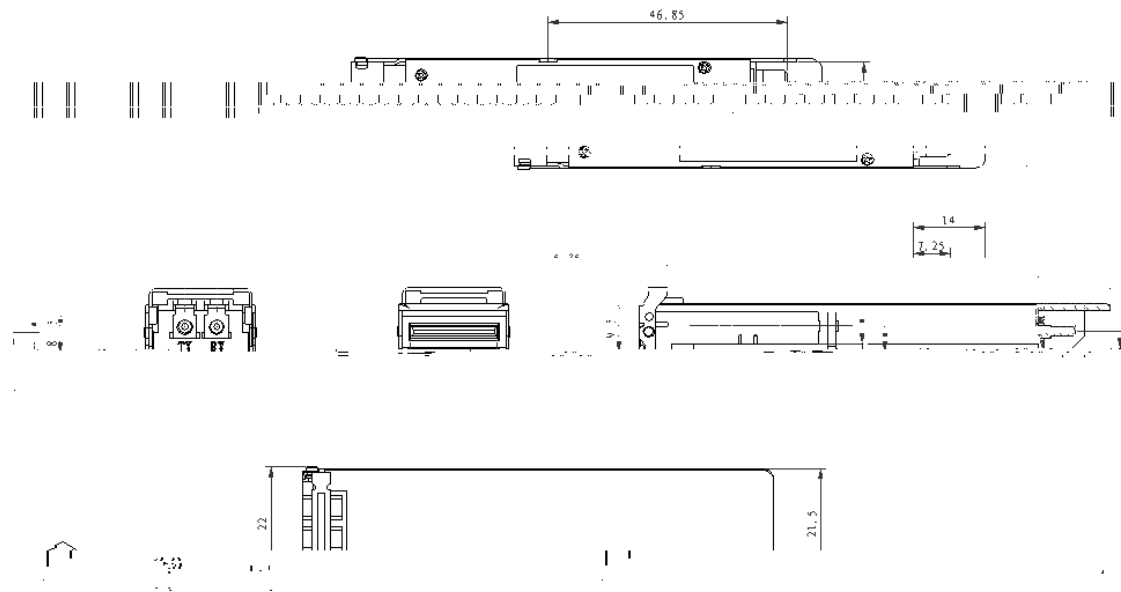

Elec a ic Di cha ge MIL-STD
 (ESD) he Elec ical Pi

CDRH 21