




100G QSFP28 CWDM4				2km		
				4	DFB	
4	PIN	4	TIA		LC	QSFP+

			Min	Typ	Max
	Tx				
Center wavelength			1264.5		1277.5
			1284.5		1297.5
		nm	1304.5		1317.5
			1324.5		1337.5
Signaling rate, per lane	Gbit/s		25.781250	100	ppm
Operating link reach	km		0.002		2
Optical modulation amplitude, per lane	OMA	dBm	-4		2.5
Transmitter and dimmer (#	mm	mm			

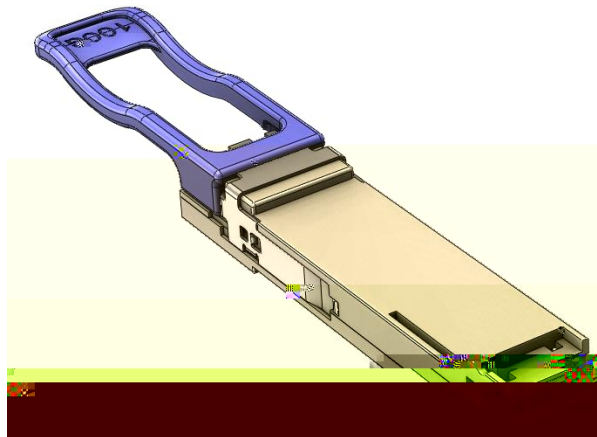