



/

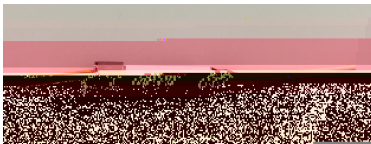

/

Mini

Telcordia GR-468-CORE

RoHS

DWDM

VMUX

Telcordia GR-468-CORE
RoHS

		Common			Mini			
	nm	1510~1610			1260~1360&1510~1610			
		1:99	5:95	10:90	1:99	5:95	10:90	
1	dB	≤0.6	≤0.7	≤1.0	≤0.6	≤0.7	≤1.0	
	dB	≤0.3						
	dB	≤0.1						
	dB	≥45						

PD	μA/mW	≥7	≥40	≥70	≥7	≥40	≥70	PIN respond to the input port
	nA	<1						@-5v V _{r,25}
	pf	≤1.5			≤10			f=1MHz;V _r =5V
	MHz	>1000			>300			RL=50,5v,-3dB
	dBm	24	17	14	24	17	14	
	V	15						
	mA	10						
		mm	Φ5.5*28			Φ3.0*22		
			75*60*12(-1)			33*31*6(8)		
			75*60*15(-2)					
			53*40*10(2/4/5)					

TAPD-□-□-□-□-□-□-□-□

- Pin Type 00: unbent 01 bent
- Bracket Style C: Φ5.5*28 M:Φ3.0*22
- Connector FC,SC,LC,MU/UPC,APC
- Fiber Length 1:1.0m customer specify
- Fiber Dia 09: Φ0.9mm 025: Φ0.25mm
- Fiber Type S: single mode fiber H: G.655 single mode fiber
- Tap Ratio: 01:1/99 05:5/95 10:10/90
- Wavelength: 1550:1510~1610nm 135:1310&1550nm

OPDM-□-□-□-□-□-□-□-□

- Connector 00: no connector FC SC LC/UPC APC
- Fiber Length 00:adapter 1:1.0m customer specify
- Fiber Dia 09: Φ0.9mm 025: Φ0.25mm
- Fiber Type S: single mode fiber H: G.655 single mode fiber
- Tap Ratio: 01:1/99 05:5/95 10:10/90
- Wavelength: 1550:1510~1610nm 135:1310&1550nm
- Channel Number: 1:Single channel 4:4 channels 8:8 channels
- Type: C:Common type M:Mini type